


Threaded Fasteners

Lecture Notes
Prepared by H. Orhan
YILDIRAN

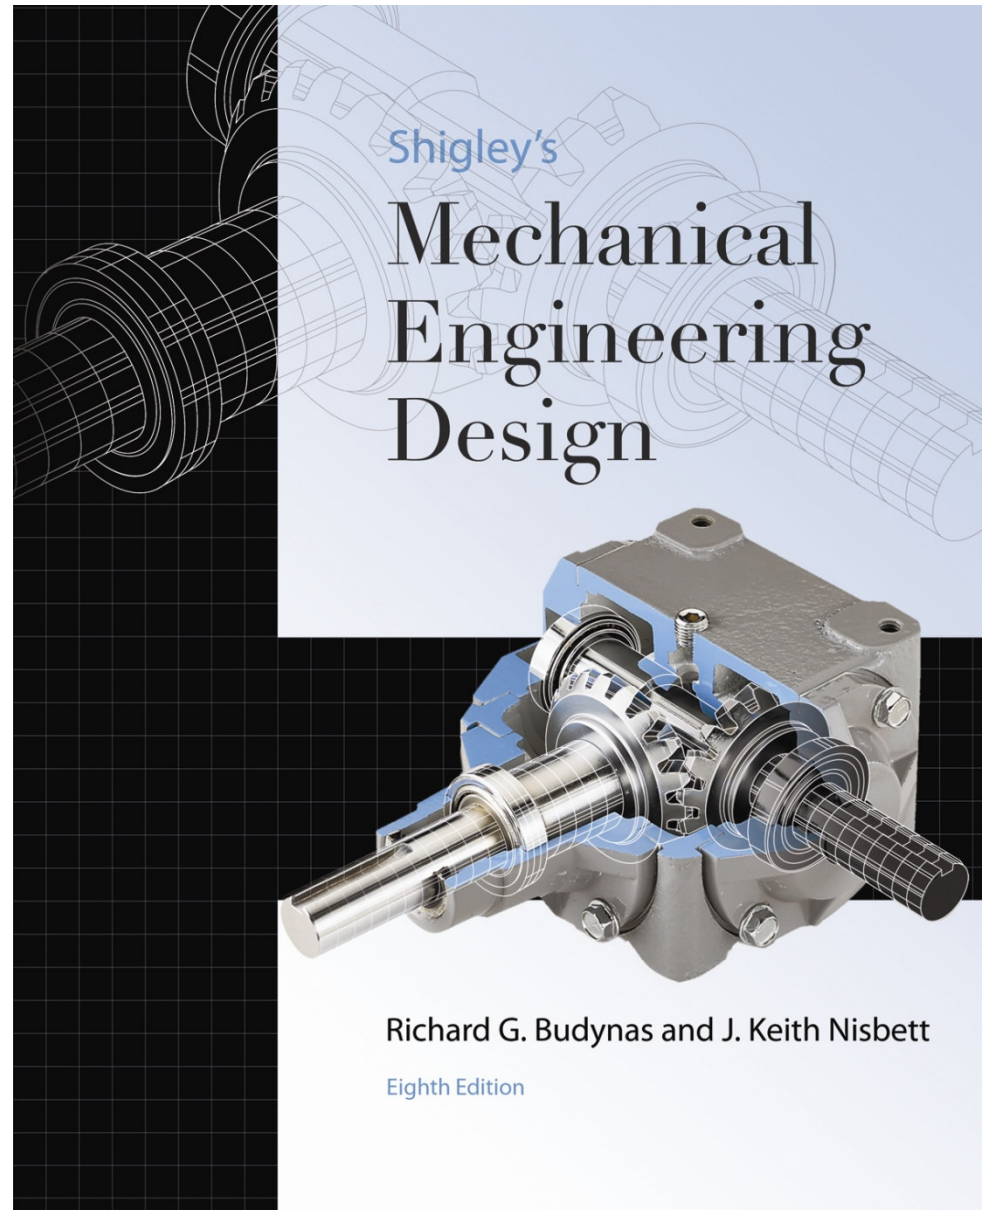

Shigley's

Mechanical Engineering Design

Richard G. Budynas and J. Keith Nisbett

Eighth Edition

LECTURE NOTES- MECE 304 Mechanical Machine
Elements

Chapter 6- Threaded fasteners

(Notes from: *Chapter 8, Budynas R.G., Nisbett J.K.,
Shigley's Mechanical Engineering Design, Mc Graw
Hill, 8th Edition*)

Spring Semester 2008/2009

Halil Orhan YILDIRAN, MS

8-1 Thread Standards And Definitions

Fig 8-1 Terminology of Screw threads is

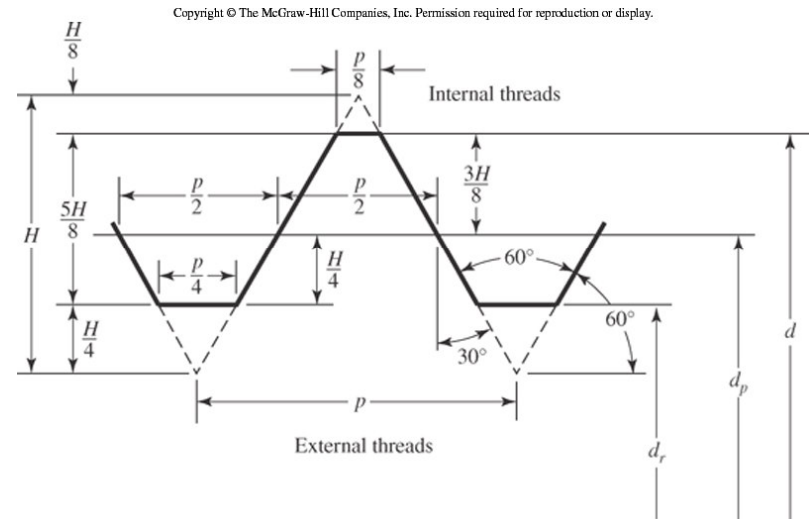
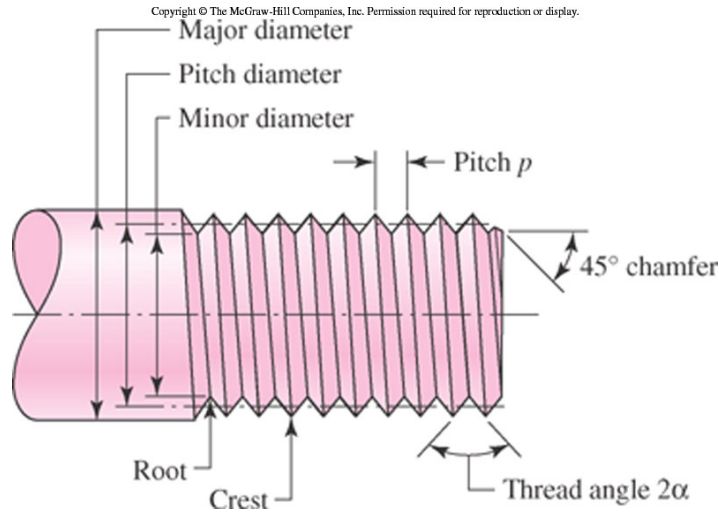


Fig 8-2 Basic profile for metric M and MJ threads

8-1 Thread Standards And Definitions

The *pitch p* is the distance between adjacent thread forms.

The *pitch line* is located at one half of the height of the theoretical sharp v-thread profile.

The *major diameter d* is the largest dia. of a screw thread.

The *lead l* is the distance the nut moves parallel to the screw axis when the nut is given one turn.

For a *single-thread*, the lead is the same as the pitch.

8-2 The Mechanics of Power screws

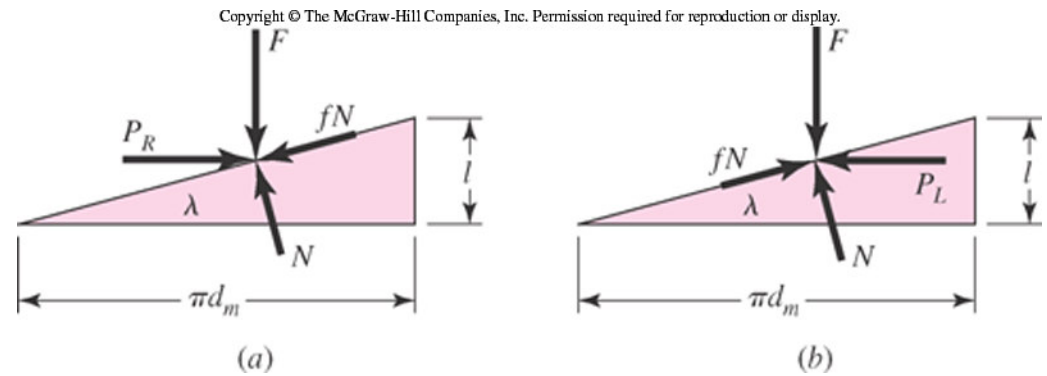
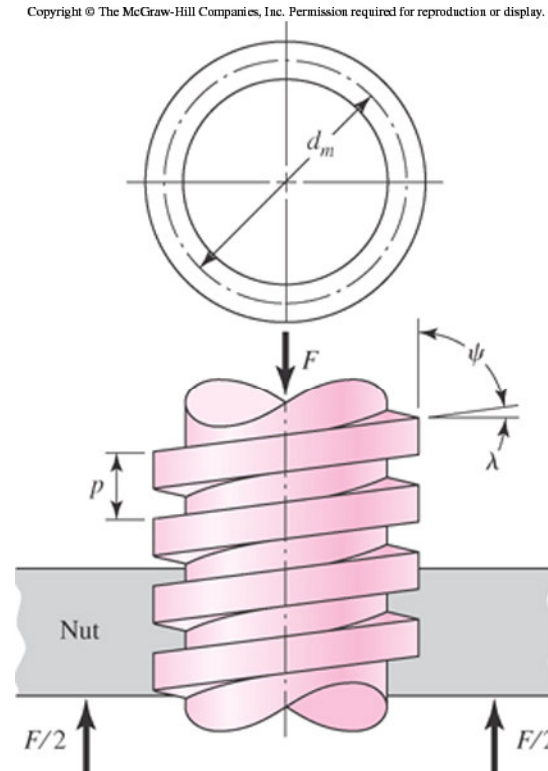


Fig 8-6 Power Screw force diagrams (a) Lifting the load (b) Lowering the load

8-2 The Mechanics of Power screws

For raising the load the torque is

$$T_R = \frac{Fd_m}{2} \left(\frac{l + \pi \cdot f d_m}{\pi \cdot d_m - f \cdot l} \right) \quad (8-1)$$

For lowering the load the torque is

$$T_L = \frac{Fd_m}{2} \left(\frac{\pi \cdot f d_m - l}{\pi \cdot d_m + f \cdot l} \right) \quad (8-2)$$

Where

dm= mean diameter

P=pitch

f=friction coefficient

L=lead of thread

The condition of self locking in eq 8-1

$$\pi \cdot f d_m > l \quad f > \tan \lambda \quad (8-3)$$

The efficiency is;

$$e = \frac{T_0}{T_R} = \frac{F.l}{2\pi.T_R} \quad (8-4)$$

For raising the load for threads other than square threads with thread angle 2α


$$T_R = \frac{F d_m}{2} \left(\frac{l + \pi \cdot f d_m \sec \alpha}{\pi \cdot d_m - f \cdot l \sec \alpha} \right) \quad (8-5)$$

The torque at the collar of the power screw

$$T_C = \frac{F f_c \cdot d_c}{2} \quad (8-6)$$

Where f_c is the friction coefficient at the collar

Fig-8-7 (a) Normal thread force is increased because of angle α
 (b) Thrust collar has frictional diameter d_c

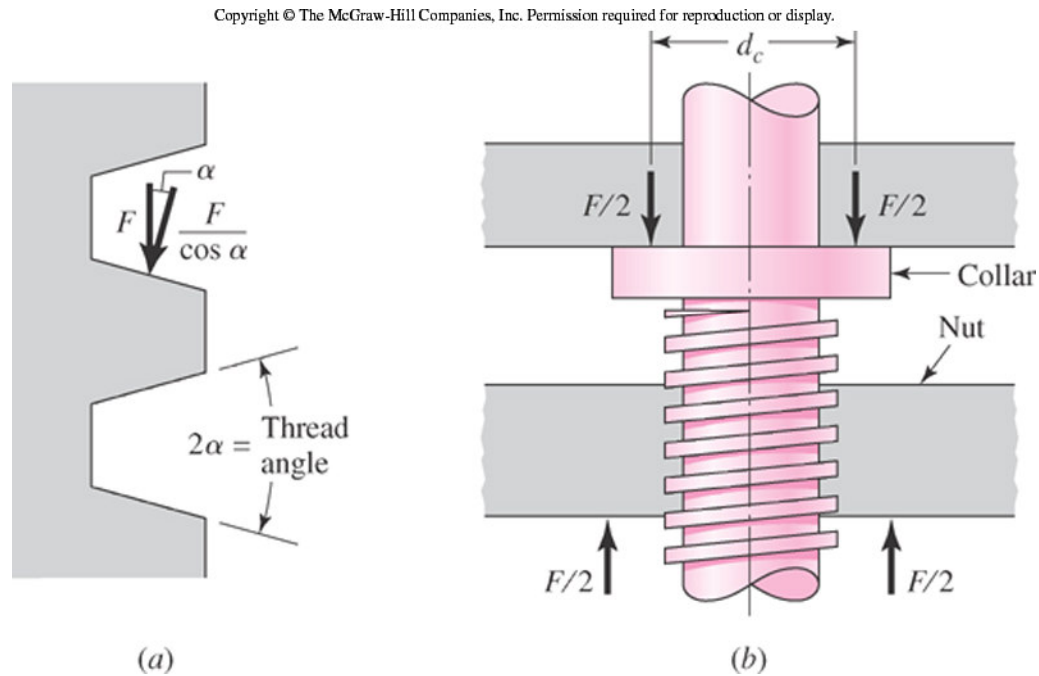

The maximum nominal shear stress;

$$\tau = \frac{16T}{\pi.d_r^3} \quad (8-7)$$

The axial stress in the body of the screw

$$\sigma = \frac{F}{A} = \frac{4F}{\pi.d_r^2} \quad (8-8)$$

The bearing stress

$$\sigma = -\frac{F}{\pi.d_m.n_t.p/2} = -\frac{2F}{\pi.d_m.n_t.p} \quad (8-10)$$

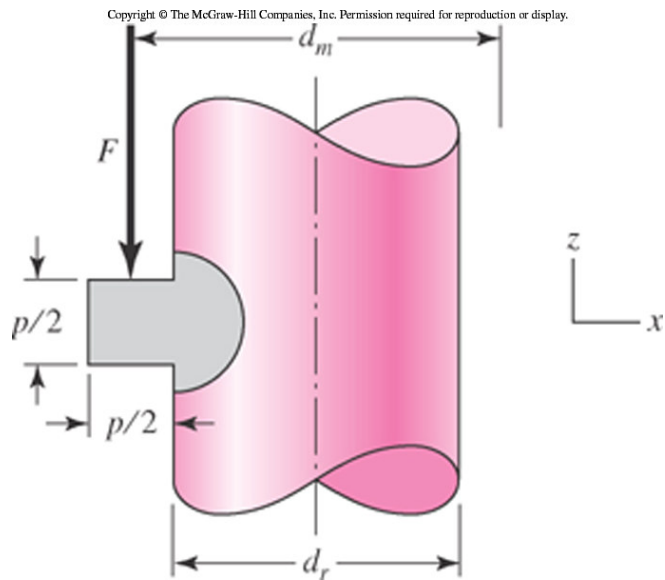


Fig 8-8 Geometry of square thread in finding bending and transverse shear stress at the thread root

The bending stress at the root of the thread

$$\frac{I}{c} = \frac{\pi d_r n_t (p/2)^2}{6} = \frac{\pi}{24} d_r n_t p^2 \quad M = \frac{Fp}{4}$$

$$\sigma_b = \frac{M}{I/c} = \frac{Fp}{4} \frac{24}{\pi d_r n_t p^2} = \frac{6F}{\pi d_r n_t p} \quad (8-11)$$

The transverse shear stress at the center of the toot of the thread due to load F

$$\tau = \frac{3V}{4A} = \frac{3}{2} \frac{F}{\pi d_r n_t p / 2} = \frac{3F}{\pi d_r n_t p} \quad (8-12)$$

The Von Mises stresses at the top of the root plane with the coordinate system in Fig 8-8

$$\sigma_x = \frac{6F}{\pi \cdot d_r \cdot n_t \cdot p}$$

$$\tau_{xy} = 0$$

$$\sigma_y = 0$$

$$\tau_{yz} = \frac{16T}{\pi \cdot d_r^3}$$

$$\sigma_z = -\frac{4F}{\pi \cdot d_r^2}$$

$$\tau_{zx} = 0$$

Note:

Threads do not carry equal loads

8-6 Bolt Strength

Proof load (F_p): *The maximum load that a bolt can withstand without acquiring a permanent set.*

Proof Strength (S_p): The strength value corresponding to proof load ($S_p = F_p / A_t$)

Preload (F_i): Initial tensile force for tightening screws and nut-bolt assemblies:

8-8 Relating bolt Torque to bolt tension

$$K = \left(\frac{d_m}{2d} \right) \left(\frac{\tan \lambda + f \cdot \sec \alpha}{1 - f \cdot \tan \lambda \sec \alpha} \right) + 0.625 f_c \quad (8-26)$$

$$T = K F_i d \quad (8-27)$$

Where K is torque coefficient








On the average when f and f_c are 0.15, $K=0.20$ regardless of the size

$$T = 0.2 F_i d \quad (8-27a)$$

MECE 304 Mechanical Machine Elements-Threaded Fasteners

Table 8-11

Metric Mechanical-Property Classes for Steel Bolts, Screws, and Studs*

Property Class	Size Range, Inclusive	Minimum Proof Strength, [†] MPa	Minimum Tensile Strength, [†] MPa	Minimum Yield Strength, [†] MPa	Material	Head Marking
4.6	M5–M36	225	400	240	Low or medium carbon	
4.8	M1.6–M16	310	420	340	Low or medium carbon	
5.8	M5–M24	380	520	420	Low or medium carbon	
8.8	M16–M36	600	830	660	Medium carbon, Q&T	
9.8	M1.6–M16	650	900	720	Medium carbon, Q&T	
10.9	M5–M36	830	1040	940	Low-carbon martensite, Q&T	
12.9	M1.6–M36	970	1220	1100	Alloy, Q&T	


*The thread length for bolts and cap screws is

$$L_T = \begin{cases} 2d + 6 & L \leq 125 \\ 2d + 12 & 125 < L \leq 200 \\ 2d + 25 & L > 200 \end{cases}$$

where L is the bolt length. The thread length for structural bolts is slightly shorter than given above.

[†] Minimum strengths are strength exceeded by 99 percent of fasteners.

Dimensions in mm

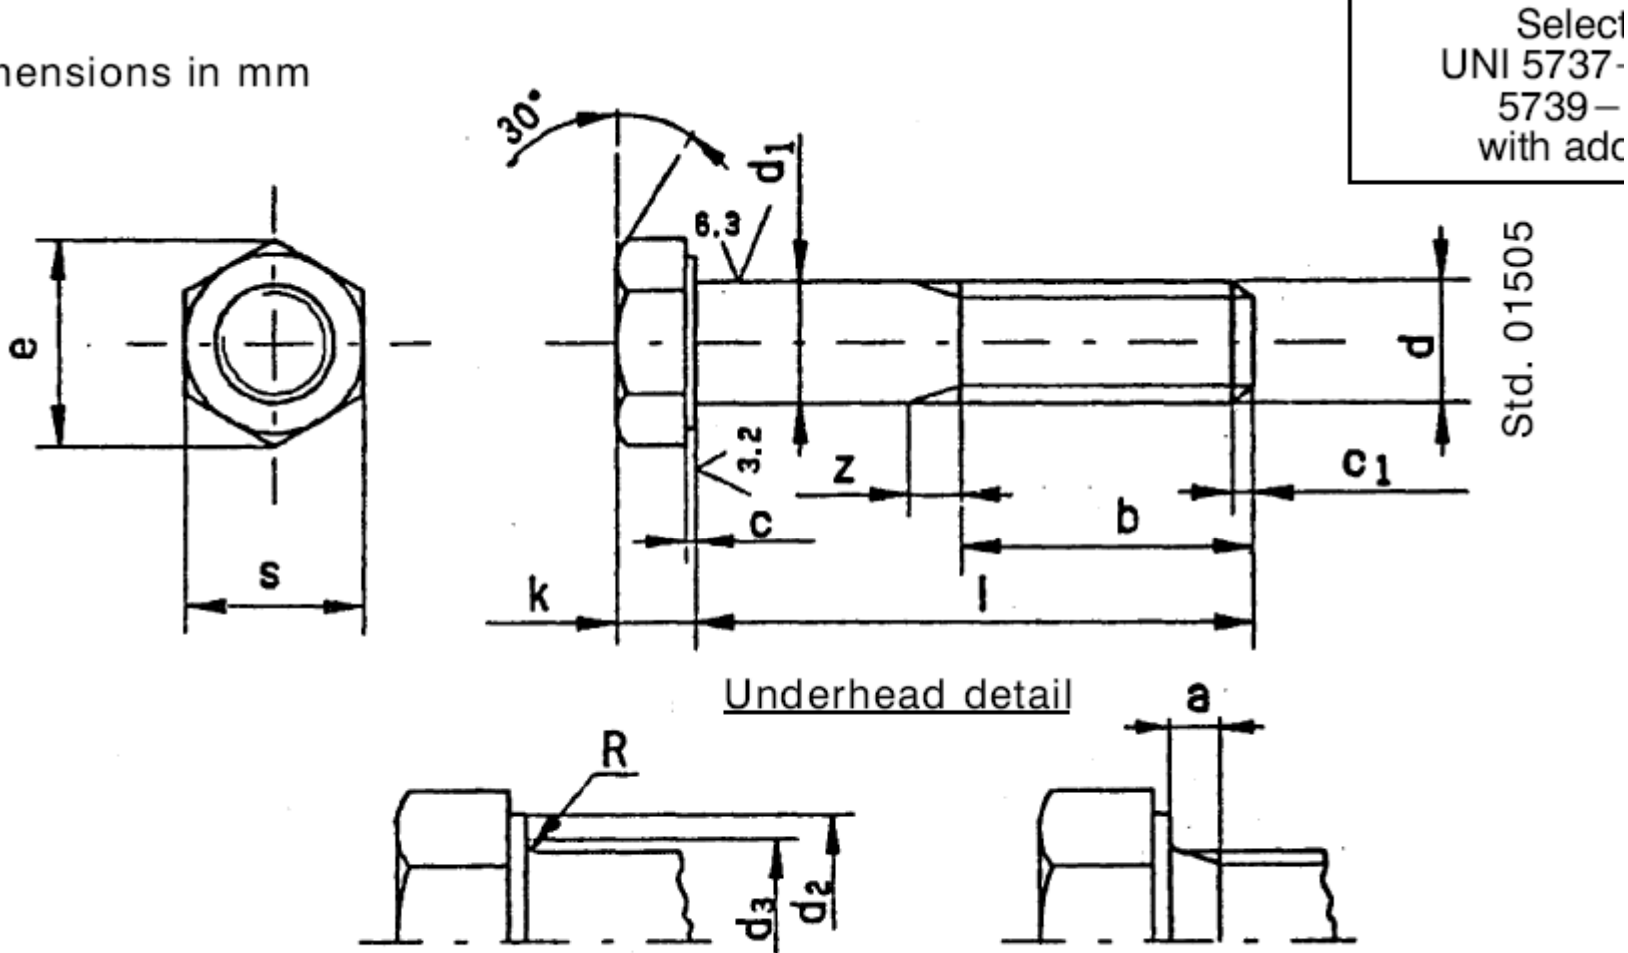


Example of designation

1/13438/24 – Std. Sh. 10312 – Hexagon bolt M10 x 1.25 x 50 – Mat. 8.8 RIV/DAC.

Springs

Lecture Notes

Prepared by H. Orhan
YILDIRAN

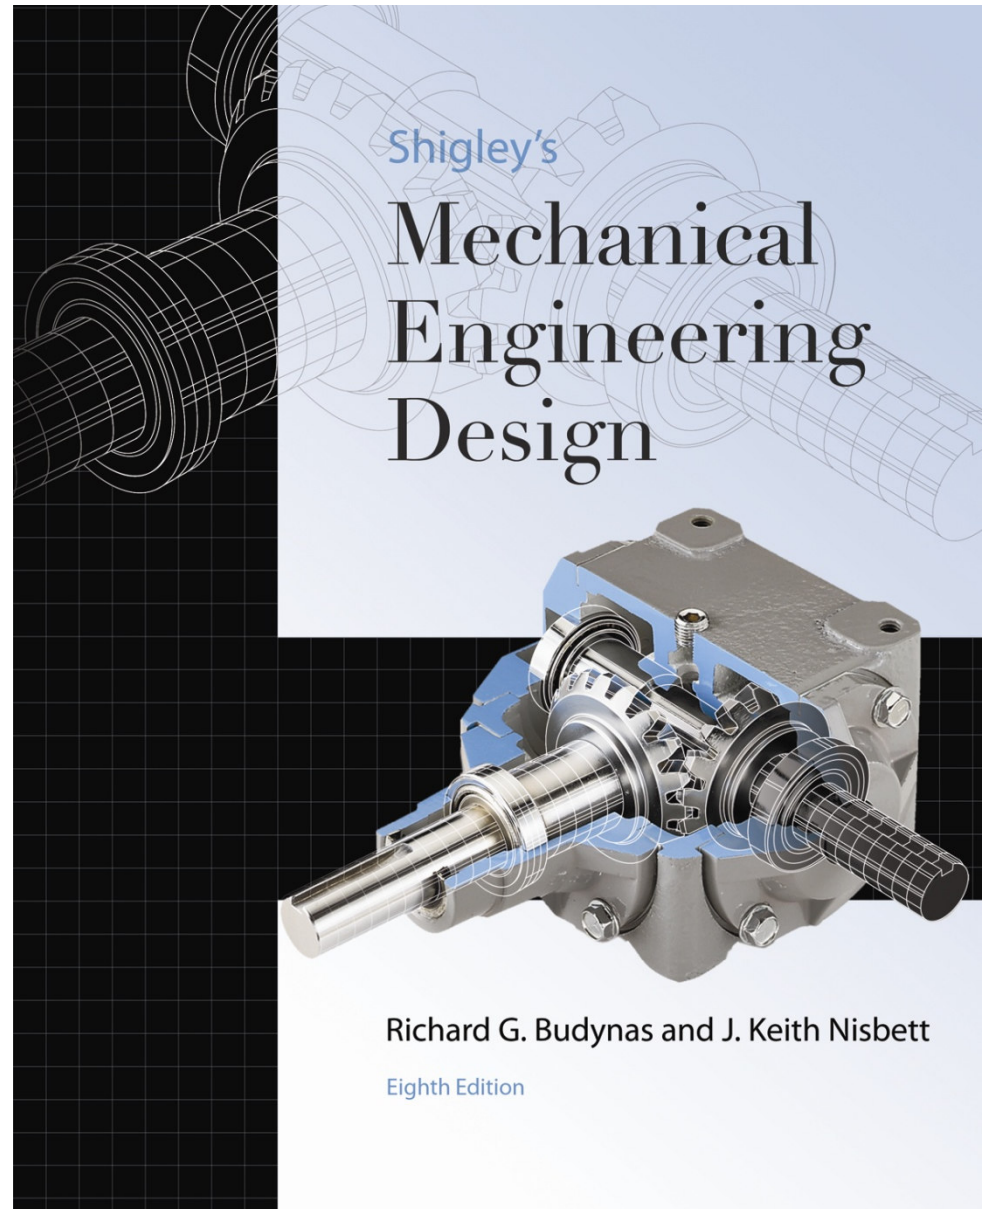

MECE 304 Mechanical Machine Elements-Springs

LECTURE NOTES- MECE 304 Mechanical Machine Elements


Chapter 6- Springs

(Notes from: *Chapter 10, Budynas R.G., Nisbett J.K.,
Shigley's Mechanical Engineering Design, Mc Graw
Hill, 8th Edition*)

Spring Semester 2008/2009

Halil Orhan YILDIRAN, MS

10-1 Stresses in helical springs

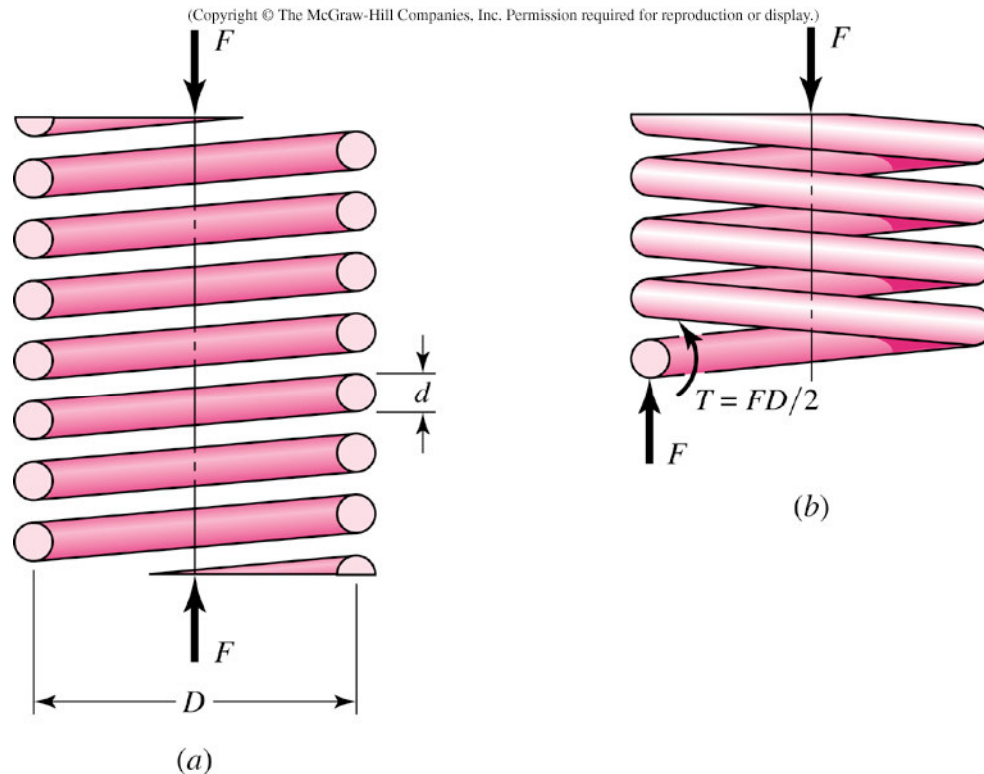

Where D = mean coil diameter, d is the wire diameter

A compression spring is an open-coil helical spring that offers resistance to a compressive force applied axially. They provide wide range of load deflection curves.

10-1 Stresses in helical springs

$$\tau = \frac{8FD}{\pi.d^3} + \frac{4F}{\pi.d^2} \quad (10-1)$$

The spring index C is defined by

$$C = \frac{D}{d} \quad (10-2)$$

Rearranging Eq 8-1

$$\tau = K_s \frac{8FD}{\pi.d^3} \quad (10-3)$$

Where K_s is the shear stress correction factor and defined by

$$K_s = \frac{2C + 1}{2C} \quad (10-4)$$

10-3 Deflection of helical springs

The slope of force vs deflection curve is called spring rate k . That is $k=F/y$ and is defined by

$$k \doteq \frac{d^4 \cdot G}{8D^3 N} \quad (10-9)$$

Where

G = shear modulus

N = number of active coils

10-4 Compression springs Generally 4 end types are used

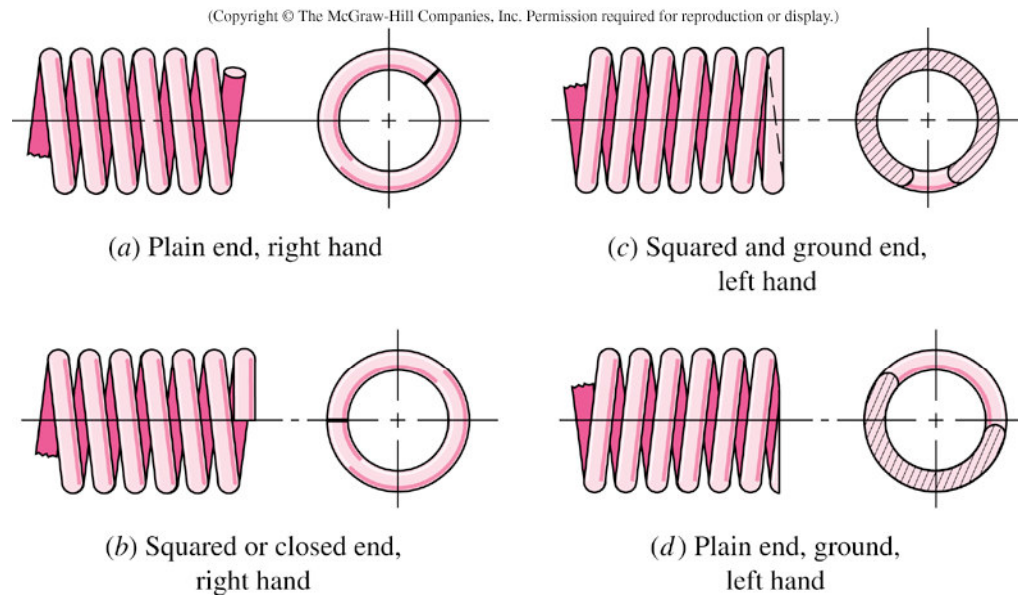


Fig 10-2 Types of ends for compression springs

Presetting of is a process to induce residual stress in the manufacture of compression springs

Table 10-1

Formulas for the Dimensional Characteristics of Compression-Springs. (N_a = Number of Active Coils)
 Source: From *Design Handbook*, 1987, p. 32.
 Courtesy of Associated Spring.

Term	Type of Spring Ends			
	Plain	Plain and Ground	Squared or Closed	Squared and Ground
End coils, N_e	0	1	2	2
Total coils, N_t	N_a	$N_a + 1$	$N_a + 2$	$N_a + 2$
Free length, l_0	$pN_a + d$	$p(N_a + 1)$	$pN_a + 3d$	$pN_a + 2d$
Solid length, L_s	$d(N_t + 1)$	dN_t	$d(N_t + 1)$	dN_t
Pitch, p	$(l_0 - d)/N_a$	$l_0/(N_a + 1)$	$(l_0 - 3d)/N_a$	$(l_0 - 2d)/N_a$

10-6 Spring materials There are various spring materials
Tensile strength vs wire diameter is almost a straight line for some
materials when plotted on a log-log paper

$$S_{ut} = A/d^m \quad (10-14)$$

For high tensile spring steels the allowable stress is

$$S_{sy} = S_{all} = 0.56 S_{ut} \quad (10-16)$$

Spring materials

Table 10-4

Constants A and m of $S_{ut} = A/d^m$ for Estimating Minimum Tensile Strength of Common Spring Wires

Source: From *Design Handbook*, 1987, p. 19. Courtesy of Associated Spring.

Material	ASTM No.	Exponent m	Diameter, in	A , kpsi · in ^{m}	Diameter, mm	A , MPa · mm ^{m}	Relative Cost of wire
Music wire*	A228	0.145	0.004–0.256	201	0.10–6.5	2211	2.6
OQ&T wire†	A229	0.187	0.020–0.500	147	0.5–12.7	1855	1.3
Hard-drawn wire‡	A227	0.190	0.028–0.500	140	0.7–12.7	1783	1.0
Chrome-vanadium wire§	A232	0.168	0.032–0.437	169	0.8–11.1	2005	3.1
Chrome-silicon wire	A401	0.108	0.063–0.375	202	1.6–9.5	1974	4.0
302 Stainless wire#	A313	0.146	0.013–0.10	169	0.3–2.5	1867	7.6–11
		0.263	0.10–0.20	128	2.5–5	2065	
		0.478	0.20–0.40	90	5–10	2911	
Phosphor-bronze wire**	B159	0	0.004–0.022	145	0.1–0.6	1000	8.0
		0.028	0.022–0.075	121	0.6–2	913	
		0.064	0.075–0.30	110	2–7.5	932	

*Surface is smooth, free of defects, and has a bright, lustrous finish.

† Has a slight heat-treating scale which must be removed before plating.

‡ Surface is smooth and bright with no visible marks.

§ Aircraft-quality tempered wire, can also be obtained annealed.

|| Tempered to Rockwell C49, but may be obtained untempered.

Type 302 stainless steel.

** Temper CA510.

Table 10-5

Mechanical Properties of Some Spring Wires

Material	Elastic Limit, Percent of S_{ut}		Diameter d , in	E		G	
	Tension	Torsion		Mpsi	GPa	Mpsi	GPa
Music wire A228	65-75	45-60	<0.032	29.5	203.4	12.0	82.7
			0.033-0.063	29.0	200	11.85	81.7
			0.064-0.125	28.5	196.5	11.75	81.0
			>0.125	28.0	193	11.6	80.0
HD spring A227	60-70	45-55	<0.032	28.8	198.6	11.7	80.7
			0.033-0.063	28.7	197.9	11.6	80.0
			0.064-0.125	28.6	197.2	11.5	79.3
			>0.125	28.5	196.5	11.4	78.6
Oil tempered A239	85-90	45-50		28.5	196.5	11.2	77.2
Valve spring A230	85-90	50-60		29.5	203.4	11.2	77.2
Chrome-vanadium A231	88-93	65-75		29.5	203.4	11.2	77.2
A232	88-93			29.5	203.4	11.2	77.2
Chrome-silicon A401	85-93	65-75		29.5	203.4	11.2	77.2
Stainless steel							
A313*	65-75	45-55		28	193	10	69.0
17-7PH	75-80	55-60		29.5	208.4	11	75.8
414	65-70	42-55		29	200	11.2	77.2
420	65-75	45-55		29	200	11.2	77.2
431	72-76	50-55		30	206	11.5	79.3
Phosphor-bronze B159	75-80	45-50		15	103.4	6	41.4
Beryllium-copper B197	70	50		17	117.2	6.5	44.8
	75	50-55		19	131	7.3	50.3
Inconel alloy X-750	65-70	40-45		31	213.7	11.2	77.2

*Also includes 302, 304, and 316.

Note: See Table 10-6 for allowable torsional stress design values.

Table 10-6

Maximum Allowable
Torsional Stresses for
Helical Compression
Springs in Static
Applications

Source: Robert E. Joerres,
"Springs," Chap. 6 in Joseph
E. Shigley, Charles R.
Mischke, and Thomas H.
Brown, Jr. (eds.), *Standard
Handbook of Machine
Design*, 3rd ed., McGraw-Hill,
New York, 2004.

Material	Maximum Percent of Tensile Strength	
	Before Set Removed (includes K_W or K_B)	After Set Removed (includes K_s)
Music wire and cold-drawn carbon steel	45	60–70
Hardened and tempered carbon and low-alloy steel	50	65–75
Austenitic stainless steels	35	55–65
Nonferrous alloys	35	55–65

10-7 Helical compression springs design for static service

$$F_s = (1 + \xi)F_{\max} \quad (10-17)$$

Where F_s is the force bringing the spring to solid height, and max force be limited to 7/8 of F_s .

For F_{\max} to be less than 7/8 of F_s we have;
the fractional overrun to closure $\xi \geq 0.15$

Recommended design conditions

$$4 \leq C \leq 12 \quad (10-18)$$


$$3 \leq N_a \leq 15 \quad (10-19)$$

$$\xi \geq 0.15 \quad (10-20)$$

$$n_s \geq 1.2 \quad (10-21)$$

Where n_s is factor of safety at solid height

Fig 10-3 Helical compression springs design flowchart

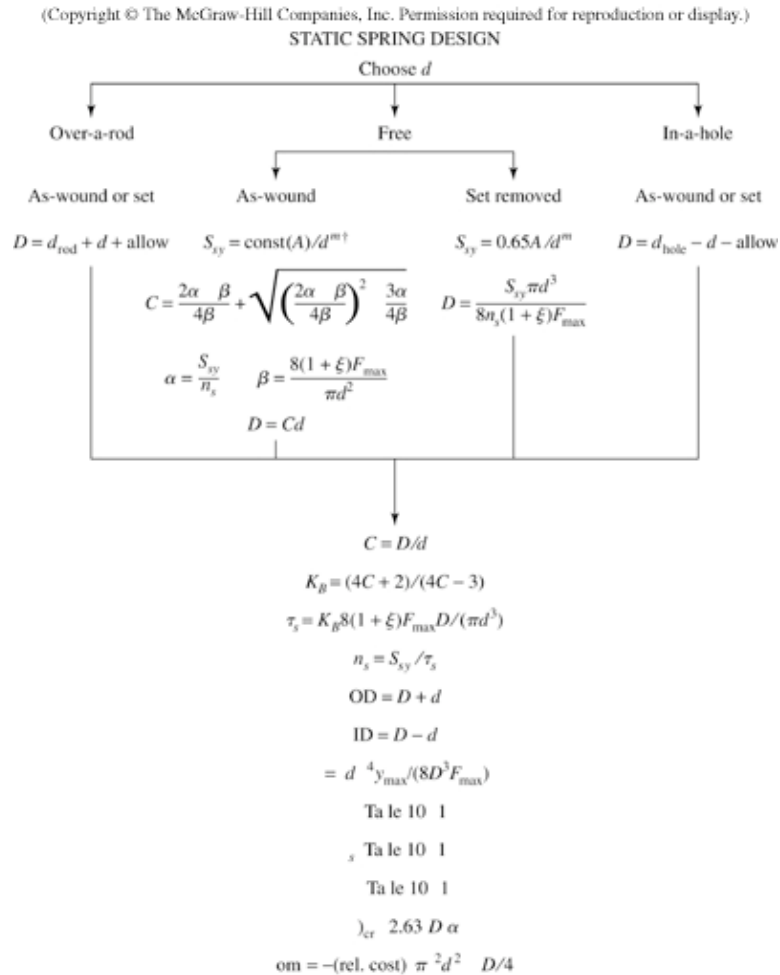

Print or display $d D C OD ID$ n_s (λ_{cr}) n_s om
 would a table conduct design assessment n_s effect on
 Eliminate n_s eas the design show n_s active constraints
 Choose among satisfactory designs using the n_s om merit
 † const n_s found from Ta le 10 6

10-11 Extension springs


$$\sigma_A = F \left[(K)_A \frac{16D}{\pi \cdot d^3} + \frac{4}{\pi \cdot d^2} \right] \quad (10-34)$$

$$(K)_A = \frac{4C_1^2 - C_1 - 1}{4C_1(C_1 - 1)} \quad C_1 = \frac{2r_1}{d} \quad (10-35)$$

$$\tau_B = (K)_B \frac{8Fd}{\pi \cdot d^3} \quad (10-36)$$

$$(K)_B = \frac{4C_2 - 1}{4C_2 - 4} \quad C_2 = \frac{2r_2}{d} \quad (10-37)$$


Fig 10-6 Types of ends used on extension springs

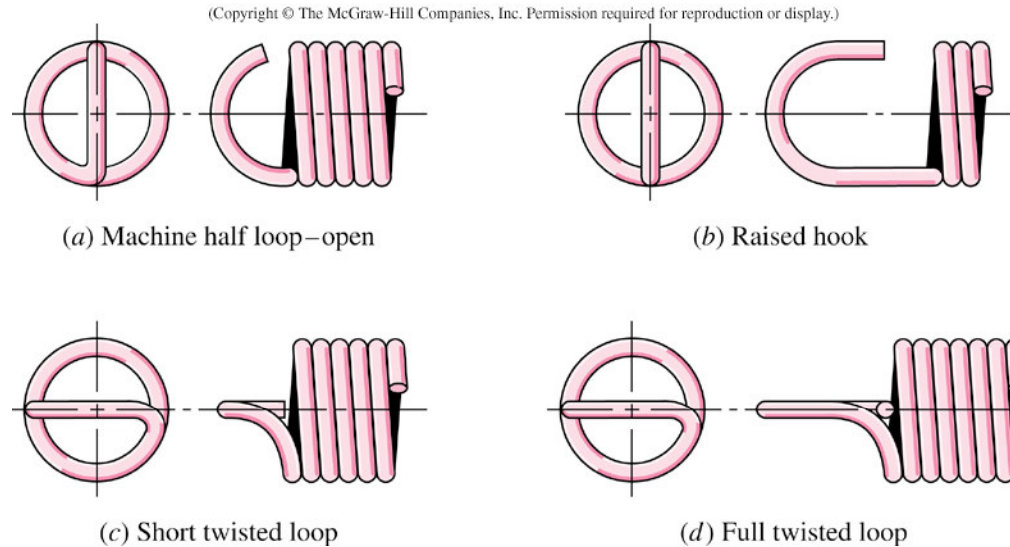

An extension spring is an open-coil helical spring that is designed to offer resistance to a tensile force applied axially. Unlike compression springs, they have specially designed hooks at both ends. They provide wide range of load-deflection curves. Standard springs has constant diameter and pitch, thus providing a constant spring rate.

Fig 10-7 Ends for extension springs.

(a) Usual design; stress at A is due to combined axial force and bending moment. (b) Side view of part a; stress is mostly torsion at B. (c) Improved design; stress at A is due to combined axial force and bending moment. (d) Side view of part c; stress at B is mostly torsion

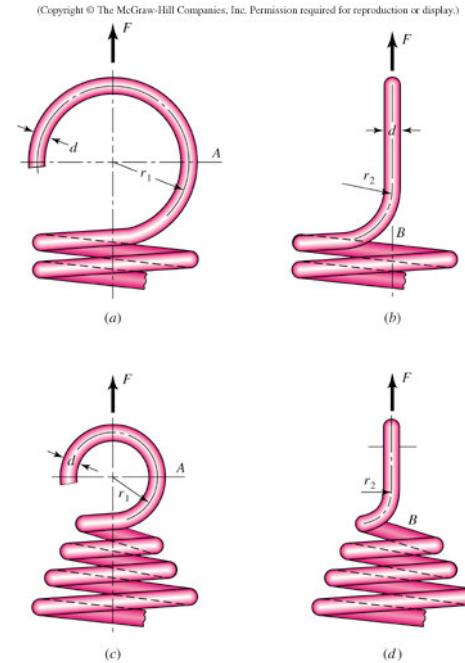

Note: Radius r_1 is in the plane of the end coil for curved beam bending stress. Radius r_2 is at a right angle to the end coil for torsional shear stress.

Fig 10-9 Torsion springs
They are used in any application where torque is required, such as door hinges, automobile starters, etc



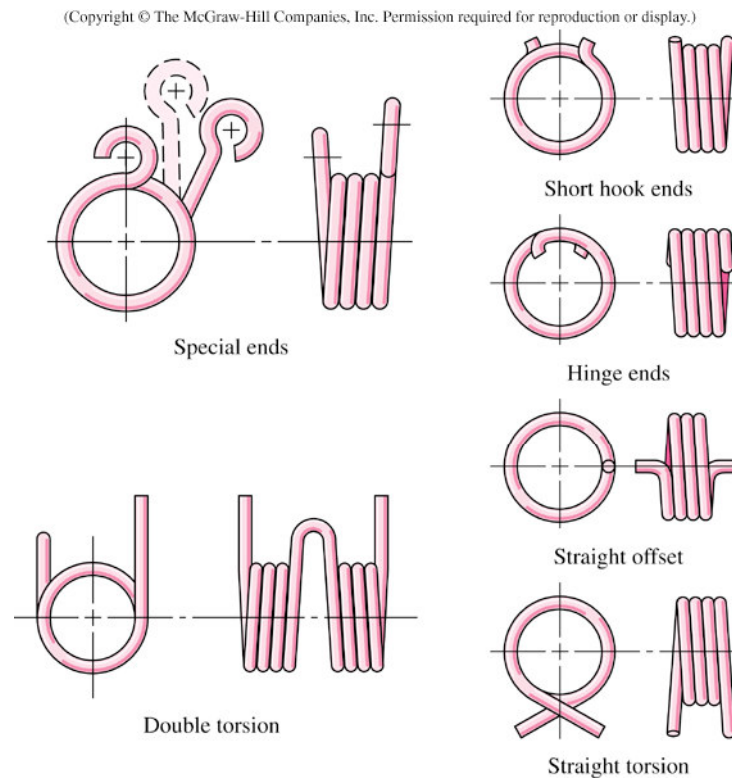


Fig 10-9 Belleville springs

- *Belleville spring is a cone-disk spring. It occupies a small axial space.
- *Their geometry can be engineered to produce highly non-linear characteristics which may display *negative stiffness*. *Belleville springs are often used in stacks.*
- * Small ones are used as washers in threaded fastener subjected to dynamic loading.

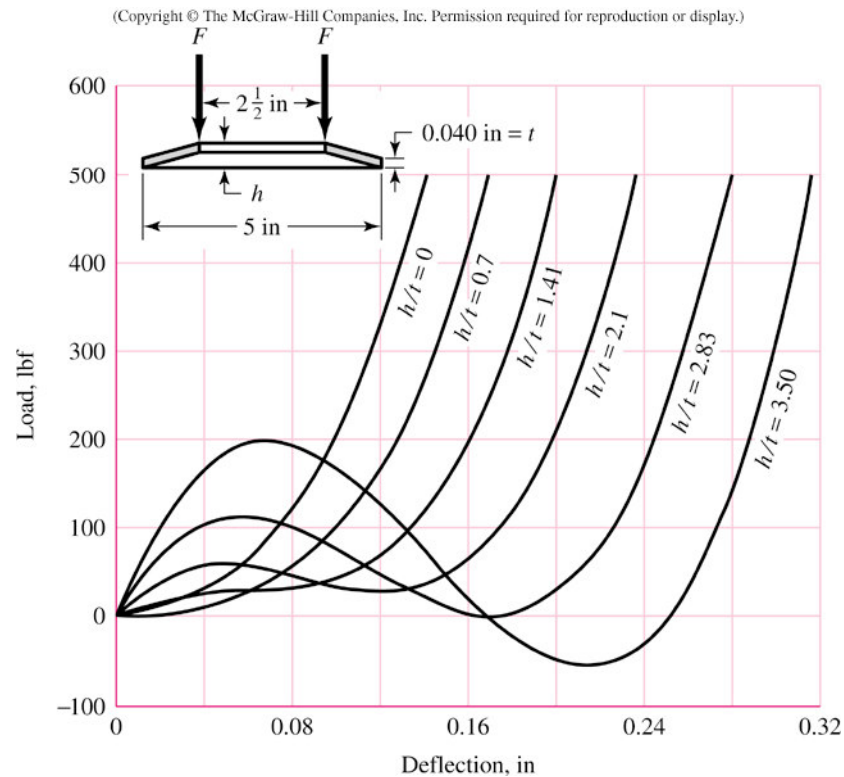

GRAPHIC REPRESENTATION of a right helix spring with closed and ground ends.

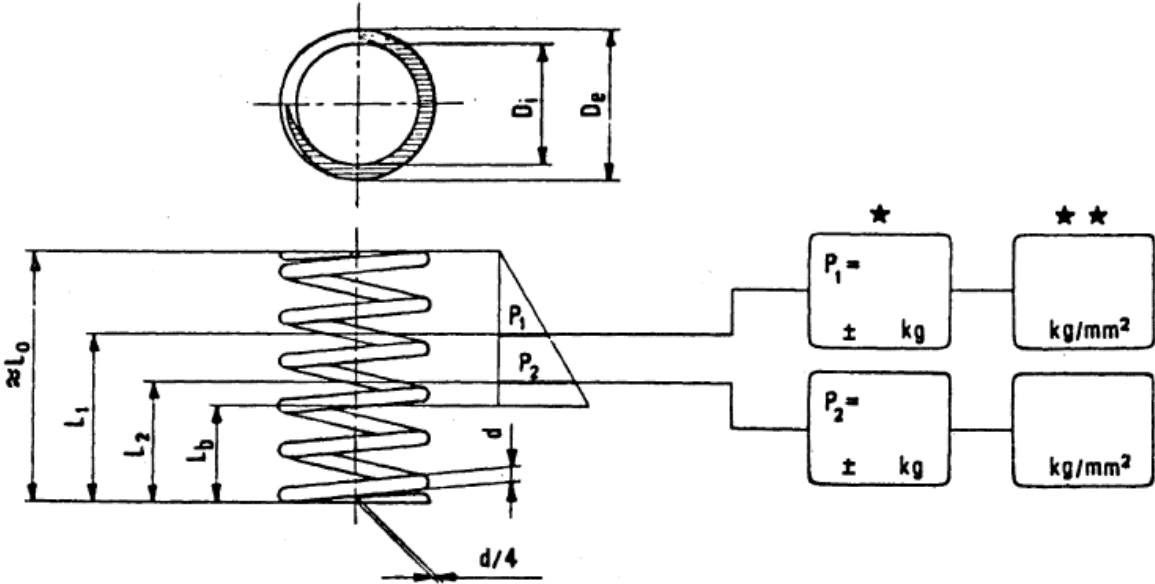

Spring data			Tolerances	
Wire diameter	d	mm	±	mm
Outside diameter	De	1) mm	±	mm
Inside diameter	Di	1) mm	±	mm
Number of active coils	i			—
Total number of coils	it		±	
Flexibility, give-in	C	mm/kg		—
Direction of helix		2)		—
Testing load	Pc	kg		—
Inspection class: see P.S. 9.01344				3)
Percentage of springs to be tested				4) %